

CloudCrossing BVBA
BE0676.494.529
Dahlialaan 1
Belgium




FORM BUTLER'S VALIDATION MESSAGES



Overview

In the Translation DataSource, create new entries for your for the custom validation messages you want to show.

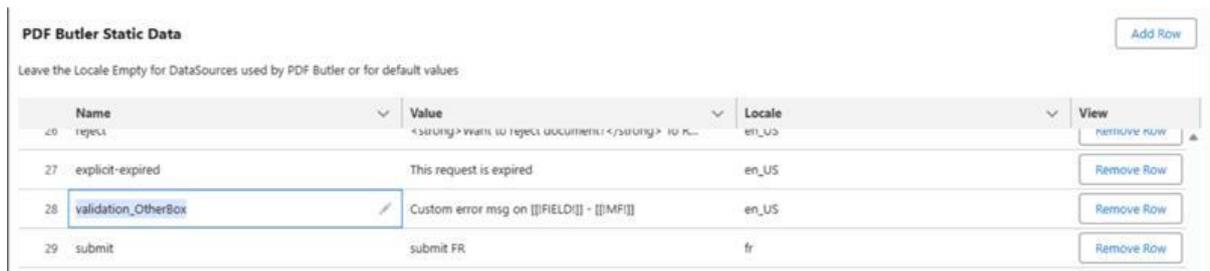

The screenshot shows a table titled "PDF Butler Static Data" with a sub-note: "Leave the Locale Empty for DataSources used by PDF Butler or for default values." The table has four columns: "Name", "Value", "Locale", and "View". There are five rows of data. The row with "validation_OtherBox" is highlighted with a blue border.

Name	Value	Locale	View
26 reject	<string>warn to reject documents</string> IU R...	en_US	Remove Row
27 explicit-expired	This request is expired	en_US	Remove Row
28 validation_OtherBox	Custom error msg on [[!FIELD!]] - [[!MF!]]	en_US	Remove Row
29 submit	submit FR	fr	Remove Row

A validation message can be added by creating a translation for the MergeField.

In the screenshot above, the MergeField is called “OtherBox”.

So the translation must be called “validation_OtherBox”. The prefix “validation_” is required to identify this message as a validation message.

In the message, you can use [[!FIELD!]] and [[!MF!]]

- [[!FIELD!]]: this is the MergeField name with any “_” removed
- [[!MF!]]: this is the MergeField name

The same translation key can be added multiple times for supporting multiple languages.

Leave the “Locale” field empty to use the translation key as the default key. The default key will be used when there is no validation message found for the locale of the user.

For the “Locale” field in the DataSource you can use:

- 1) Empty: this will be seen as the default message
- 2) Locale: combination of language and country eg en_US or fr_CH
- 3) Language: when it is not required to split up languages per country. Eg fr